

SECOM LED Wall light fixture BAMA


SECOM LED Indoor /outdoor wall light BAMA

BAMA wall light suitable for outdoor lighting with IP54. It incorporates small fins located at the bottom and top of the wall light that regulate the angle of light output, diffusing or accentuating its intensity and creating a pleasant visual effect. Wall light LED of 6W and warm white light color (3000K).


Available as a square and a circular version. Housing of aluminium sheet metal with thermo painted coating. Available housing colors, white, black, grey, matt chrome and titanium. All models include a LED driver and LED's. Voltage range 220-240Vac 50/60Hz. Protection IP54. Estimated useful life exceeding 30.000 hours, CRI >80.



Article No.	Description	Watt	Lumen	CRI	Colour
83SEC655010683	BAMA White 3+3W Square	6	457	>80	3000K
83SEC655020683	BAMA Black 3+3W Square	6	457	>80	3000K
83SEC655520683	BAMA Matt Chrome 3+3W Square	6	457	>80	3000K
83SEC655900683	BAMA Titanium 3+3W Square	6	457	>80	3000K
83SEC655580683	BAMA Grey 3+3W Square	6	457	>80	3000K



Article No.	Description	Watt	Lumen	CRI	Colour
83SEC656010683	BAMA White 3+3W Circular	6	457	>80	3000K
83SEC656020683	BAMA Black 3+3W Circular	6	457	>80	3000K
83SEC656520683	BAMA Matt Chrome 3+3W Circular	6	457	>80	3000K
83SEC656900683	BAMA Titanium 3+3W Circular	6	457	>80	3000K
83SEC656580683	BAMA Grey 3+3W Circular	6	457	>80	3000K

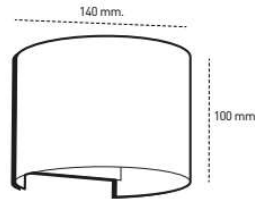

Trevos SB LED Indoor Luminaire

Trevos LED Indoor luminaire IP20

Aluminium indoor LED light fitting intended for surface-mounted installation on the ceiling or on the wall, with diffuser made of translucent acrylate and with built-in switch in side lid.

The light fitting is suitable for sanitary facilities, kitchen units, wall units, cloakrooms, work surfaces and shop windows.

Power supply Isolated, current driver.

Voltage range 220-240Vac 50/60Hz, Mac Adam 3 SDCM.

Protection IP20, Rank I.

For ambient temperatures max. +35°C.

Housing made of aluminium, white powder painted RAL 9003.

Diffuser translucent polycarbonate (PC), UV stable and impact resistant.

Cable gland of white rubber. Side covers: White plastic (ABS).

Connection: Terminal block screwed, three poles.

Switch built-in at side cover.

LED efficacy **up to 145 lm/w.**

Light color standard 4000K (optional 3000K), CRI >80.

Factory warranty 5 years.


Attachement method: directly to a ceiling or wall with use of screws.

Slide mounting spacers (PA GF).


The watt and lumen values can, in accordance with valid standards, vary by $\pm 7,5\%$.

* = Luminous flux of light fitting.

Developed and produced in the Czech Republic.



Article No.	Description	Watt	Lumen *	Dimensions in mm AxBxC	Mounting spacing in mm D	Light color
89TR22415	SB LED 1.1ft 1100/840	9	1080	360x38x67	230	4000K
89TR22425	SB LED 1.2ft 2200/840	15	2130	590x38x67	460	4000K
89TR22435	SB LED 1.4ft 4400/840	30	4250	1150x38x67	1020	4000K
89TR22445	SB LED 1.5ft 5500/840	37	5360	1430x38x67	1300	4000K

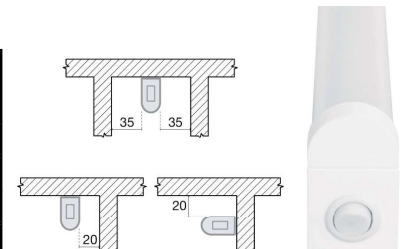


LED Indoor wall mounted light fixtures

Wall luminaire DUMBO with flexible arm

Chrome or coated steel body
Build-in LED driver. Independent switch. Voltage range: 230Vac 50/60Hz
Light source Seoul LED, Driver 700 mA - 6V, CRI of >80, power factor 0,5.
Dimensions 390x29x18mm + base 120x60mm. Weight 0,3 kg. Protection IP20.


Article No.	Description	Watt	Lumen	Color Kelvin
89MCHO42619	Dumbo LED Black	3W	150 lm	3000K
89MCHO42620	Dumbo LED Chrome	3W	150 lm	3000K



Wall luminaire DUMBO with adjustable arm

Chrome or coated steel body
Build-in LED driver. Independent switch. Voltage range: 230Vac 50/60Hz .
Light source Seoul LED. Driver 700 mA - 6V, CRI of >80, power factor 0,5.
Dimensions 72,5x133x29mm + base 120x18x60mm. Weight 0,26 kg. Protection IP20.

Article No.	Description	Watt	Lumen	Color Kelvin
89MCHO42621	Dumbo LED Black	3W	150 lm	3000K
89MCHO42622	Dumbo LED Chrome	3W	150 lm	3000K

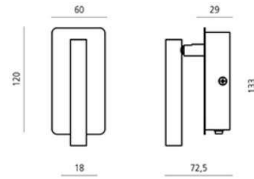

Wall luminaire with flexible arm

Material: steel and plastic available in 3 different colors.
Build-in LED driver. Built-in small switch.
Built-in USB charging port.
Light source LED non replaceable.
Voltage range: 220-240V and 50/60Hz with safety class I.
Non-dimmable light source.
Light angle: 110° .
Nominal light output 450 lumen and light color 3000K Warm White. CRI >80
Nominal life time 25.000 hours, nominal switch cycle 15.000.
Energy consumption 3.5W efficiency class A++ .
Dimensions: 300x65x160mm.

Article No.	Description	Watt	Lumen	Color Kelvin
89EG33452	Wall light Black	3,5W	450 lm	3000K
89EG96566	Wall light White	3,5W	450 lm	3000K
89EG96567	Wall light Nickel-mat black	3,5W	450 lm	3000K



Wall luminaire ZANTE

Painted aluminium body.
Build-in LED driver.
Voltage range: 230Vac 50/60Hz.
Light source SMD EDISON LED.
Driver DC 17-26V - 350 mA.
CRI of >80, power factor 0,7.
Dimensions 207x60x126mm WxDxH.
Weight 0,75 kg.
Protection IP54. Made in Italy.

Article No.	Description	Watt	Lumen	Color Kelvin
89MCHO40228	Zante LED White	10W	850 lm	3000K
89MCHO40229	Zante LED Grey	10W	850 lm	3000K
89MCHO40230	Zante LED White	10W	900 lm	5000K
89MCHO40231	Zante LED Grey	10W	900 lm	5000K

